


# Mini Guide – Bourne Seal Natural


Available in 5 L



Fast drying, high gloss finish




Solvent based Polyurethane wood floor sealer



Resistant to water, oil and stains

## Use for sealing:

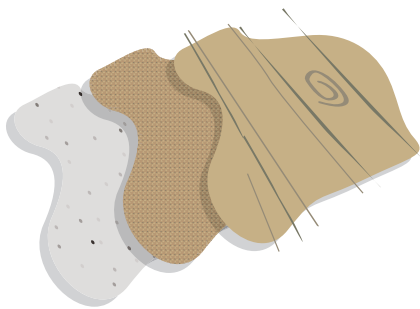

Wood and cork floors


## Using...

1



**Ventilate the area**  
Ensure the floor to be sealed is clean and free from polish and dust.

2

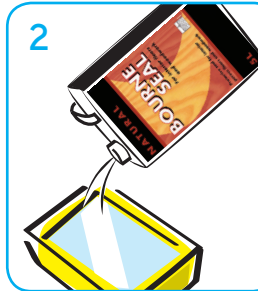


Pour sufficient product into bucket or tray.

3



Using a clean lambs wool applicator, paint roller or paint brush apply the seal. Work with the grain and avoid overlapping.

4

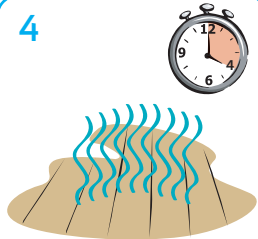


The floor should be dry enough for second application after 2-4 hours.

5



After 4 hours provided the seal is dry, abrade the seal with a medium grade nylon pad or fine grade sandpaper. Remove dust and apply second coat at right angles to the first.

6

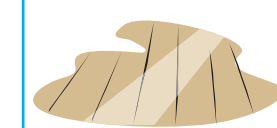

Floor will be dry and can be opened to light traffic 24 hours after application.

